

PRODUCT INTRODUCTION

Mondo A30, are tiny downlights for shelves and niches, not only a thinner structure, but also create the adjustable beam angle direction with 360 ° rotatable and +/- 30 ° tiltable, Its CRI up to Ra95, Ra>90 with a soft and accurate light, offers excellent and accurate lighting for the exhibits.

SPECIFICATION

Wattage : 1W

Color temperature : 2700K / 3000K / 3500K / 4000K

CRI : Ra98/95 (R9>90)

Round distribution : 24°

Driver : Input voltage DC2-4V 350mA(MAX)

Dimming : 0/1-10V , DALI , TRIAC , CASAMBI

FEATURES

Product surface color : Silver, Black, Customized


Adaptor : Recessed

Protection degree : IP20 (En60598)

Energy efficiency: EEIA



Radial distribution & Conical illuminance

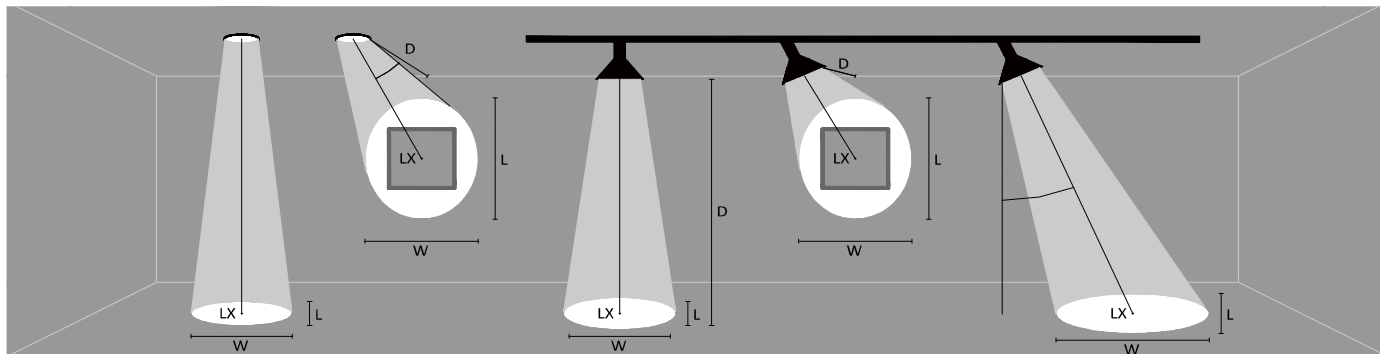


D Distance To Fix From Wall or Floor

LX Initial illuminance Level At Center of Beam

L Beam Length(where candlepower drops to 50% of maximum)

W Beam Width(where candlepower drops to 50% of maximum)

Radial distribution & Conical illuminance

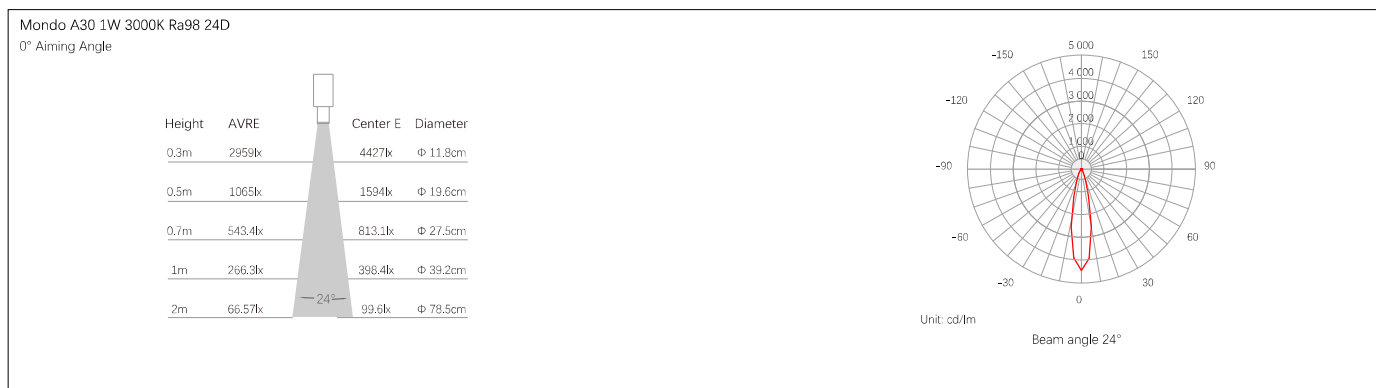

Specifications

Model No.	Total Power (W)	LED Power (W)	Voltage	CRI (Ra)	Color Temp (K)	LED Flux (lm)	Beam Angle	IP Grade
Mondo A30	1	0.9	DC2-4V	98/95	2700	100	24°	IP20
					3000	110		
					3500	110		
					4000	112		

· Thermally stable typical lumens (±10%)

Package information

Model No.	Packaging/Unit	Pieces/Unit	Dimensions (L x W x H)	Gross Weight	Volume
Mondo A30	Inner box	1	70x70x50mm	0.03kg	0.245dm³
	Outer box	100	380x380x230mm	8kg	33.212dm³